



Adore StyleLine BT


Made for
 iPhone | iPad | iPod

.....
Data Sheet
.....

www.rexton.com


REXTON 

Adore StyleLine BT · Technical Data

Type	Receiver	
		
	2 ccm coupler	Ear simulator
Output sound pressure level		
at 1.6 kHz	-	123 dB SPL
Peak	119 dB SPL	129 dB SPL
HFA-OSPL 90	113 dB SPL	-
Gain		
Full on gain (FOG) at 1.6 kHz	-	55 dB
Full on gain (Peak)	60 dB	70 dB
HFA-FOG	50 dB	-
Reference test gain	36 dB	48 dB
Frequency, noise and directivity		
Frequency range	100 - 9000 Hz	100 - 10000 Hz
Equivalent input noise	19 dB SPL	24 dB SPL
Total harmonic distortion at 500 / 800 / 1600 / 3200 Hz	2 / 2 / 2 / 1 %	3 / 5 / 4 / - %
AI-DI	4.0 dB	
Inductive coil sensitivity		
MASL (1 mA/m) at 1.6 kHz	-	-
HFA MASL (1 mA/m)	-	-
HFA SPLITS (left/right)	-	-
RSETS (left/right)	-	-
HFA SPLIV	-	-
Battery		
Battery voltage	1.25 V	
Battery current drain	1.4 mA	1.4 mA
Battery runtime (without streaming)	up to 19 h	
Battery runtime (incl. 5 h streaming)	up to 16 h	
IRIL IEC 60118-13:2016 Ed. 4.0		
700-960 MHz (rating)	user	
1400-2000 MHz (rating)	user	
2000-2700 MHz (rating)	user	
ANSI C63.19-2011		
800-950 MHz (rating)	M4	
1600-2500 MHz (rating)	M4	

Please find additional information to the values on page "Further Information"


Adore StyleLine BT · Fitting Range

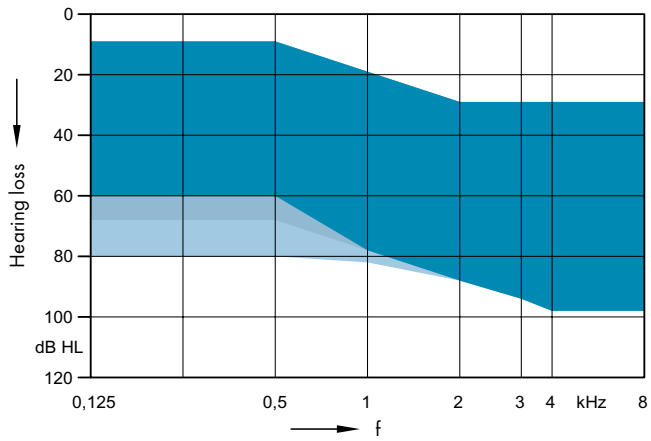




- Open Click Domes
- + Double Click Domes
- + Click Mold (no vent)

Adore StyleLine BT · Basic Data

2 ccm coupler

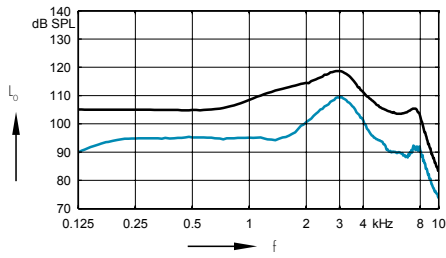

Ear simulator

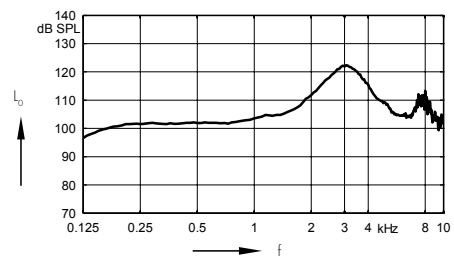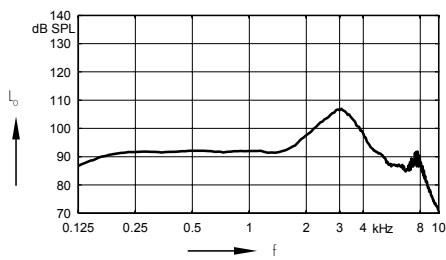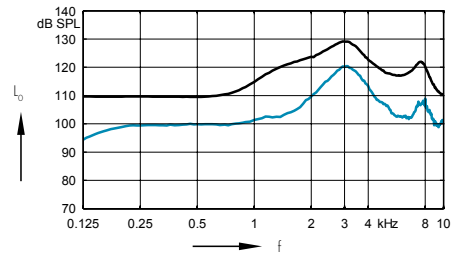

Adore StyleLine BT · Features and Accessories

MyCore Platform	
Signal processing (channels) / Gain/MPO (handles)	48 / 20
Hearing programs	6
Direct Audio Streaming ¹⁾ / Made for iPhone	●
My Voice ²⁾	●
Wireless Sync ²⁾	●
Volume and control coupling ²⁾	●
MyCore Speech	
HD Bandwidth (up to 10 kHz)	●
iFocus 360 ²⁾	automatic
Focus 360	●
HD Directionality	●
Stereo iLock ²⁾	●
Directional iLock ²⁾	Premium
Voice Ranger	●
XPhone ²⁾	●
Multichannel Adaptive Directional Microphone	●
Automatic Directional Microphone	●
Fixed Directional Microphone	●
Bandwidth Compression	●
Intelligent Feedback Preventer	●
MyCore Sound Quality and Comfort	
Dynamic Extender	●
Auto Volume ³⁾	●
Microphone-pattern adjustment ^{2) 4)}	Premium
Reverb Reducer	●
Music Enhancer	Premium
iOmni	●
Sound Smoothing (settings)	3
Intelligent Wind Noise Cancellation ²⁾	Premium
Wind Noise Cancellation	●
Noise Management	●
MyCore Automatic Optimization	
Smart Automatic Equalizer	Premium
Smart Automatic Acclimatization	Premium
Automatic Classifier	●
Data Logging	●

¹⁾ Apple iPhones 5 and later

²⁾ Bilateral fitting required

³⁾ Streaming only

⁴⁾ requires Connexx Smart Direct App

⁵⁾ Availability is country-dependent

● available – not available

Performance levels: Premium High Standard

Adore StyleLine BT · Features and Accessories

Style specific features	
SecureTec protection	IP68
Charging contacts	●
Battery Size	–
Battery door on/off function	–
Nanocoated housing	–
Wireless programming	●
Instrument configurations	
Flat cover	–
Rotary volume control	–
Push button	–
Rocker switch	–
Color conversion kit	–
Battery door - integrated telecoil	–
Battery door - child lock	–
Small earhook	–
Programming accessories	
ConnexxAir / ConnexxLink	– / –
Noahlink Wireless	●
Programming adapter / cable	–
Accessories	
Connexx Smart Key	○
Connexx Smart Transmitter 2,4	○
Connexx Smart Mic	○
Slim-RIC BT Charging Case	mandatory
Apps	
Connexx Smart Direct App	○

● available ○ optional – not available

Adore StyleLine BT

Further Information

Abbreviations

The following abbreviations are used in this datasheet:

OSPL	Output Sound Pressure Level
HFA	High Frequency Average
FOG	Full On Gain
MASL	Magneto Acoustical Sensitivity Level
SPLITS	Coupler SPL for an Inductive Telephone Simulator
RSETS	Relative Equivalent Telephone Sensitivity
SPLIV	SPL In a Vertical magnetic field
AI-DI	Articulation Index - Directivity Index
IRIL	Input Related Interference Level
RTF	Reference Test Frequency

Standards and additional information

- ▶ All measurements with the 2 ccm coupler were performed according to ANSI S3.22-2014 and IEC 60118-0:2015 if applicable.
- ▶ All measurements with an ear simulator were performed according to IEC 118-0/A1:1994 and to DIN 45605 (frequency range) if applicable.
- ▶ Curves and figures representing FOG are measured with 20 dB reduction and 70 dB SPL input level.
- ▶ Figures representing Equivalent Input Noise incorporate a moderate expansion.
- ▶ Inductive coil sensitivity values, inductive response curves and T ratings apply for instruments with telecoil battery door only.
- ▶ The following acoustic connections / ear pieces were used:
 - Receiver Unit: Closed Click Dome
- ▶ The current consumption is measured in reference test setting (RTS) according to the applicable standards. Due to the settling behaviour of hearing instruments supporting RF (radio frequency), the battery current is measured 3 minutes after turning on (note: no pairing).
- ▶ The battery runtime is based on first fit settings using 60% of the fitting range and an ISTS (International Speech Test Signal) input signal at 65 dB SPL (note: pairing established). The actual battery runtime is determined by battery quality, hearing loss, sound environment, usage and activated feature set. Regarding RF usage (Bluetooth streaming) two different conditions are considered.
- ▶ Note: due to the design of the Slim-RIC BT Charging Case, not all Click Molds will fit inside it.

Special note for instruments with built-in lithium-ion rechargeable battery

- ▶ The runtime of all lithium-ion rechargeable batteries reduces over time. The estimates are based on fresh lithium-ion rechargeable battery capacity. Under normal operating conditions, the battery will retain up to 80% of its initial capacity after 2 years of use. Please note that battery performance will vary depending on individual usage patterns and environmental conditions.

Made for

 iPhone | iPad | iPod

"Made for iPod", "Made for iPhone", and "Made for iPad" mean that an electronic accessory has been designed to connect specifically to iPod, iPhone, or iPad, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPod, iPhone, or iPad may affect wireless performance.

The information in this document contains general descriptions of the technical options available, which do not always have to be present in individual cases and are subject to change without prior notice.

The required features should therefore be specified in each individual case at the time of conclusion of the respective contract.

WARNING

Choking hazard posed by small parts.

- ▶ This instrument is not intended for the fitting of infants, children under 3 years or persons of mental incapacity.