

M-Core SR

M-Core SR SDemo

DATA SHEET

80

60

40



Made for
iPhone | iPad | iPod

S-Receiver

- 56 dB / 119 dB SPL (ear simulator)
- 45 dB / 108 dB SPL (2 ccm coupler)

M-Receiver

- 70 dB / 129 dB SPL (ear simulator)
- 60 dB / 119 dB SPL (2 ccm coupler)

P-Receiver

- 80 dB / 134 dB SPL (ear simulator)
- 70 dB / 124 dB SPL (2 ccm coupler)

M-Core SR · Technical Data

Type	S-Receiver		M-Receiver	
	2 ccm coupler	Ear simulator	2 ccm coupler	Ear simulator
Output sound pressure level				
OSPL 90 at 1.6 kHz	–	109 dB SPL	–	123 dB SPL
OSPL 90 (Peak)	108 dB SPL	119 dB SPL	119 dB SPL	129 dB SPL
HFA-OSPL 90	101 dB SPL	–	113 dB SPL	–
Gain				
FOG at 1.6 kHz	–	43 dB	–	55 dB
FOG (peak)	45 dB	56 dB	60 dB	70 dB
HFA-FOG	37 dB	–	50 dB	–
Reference test gain	24 dB	34 dB	36 dB	48 dB
Frequency, noise and directivity				
Frequency range 80 60 / 40	100 - 10000 Hz 100 - 8200 Hz	100 - 10000 Hz 100 - 8300 Hz	100 - 9400 Hz 100 - 8200 Hz	100 - 10000 Hz 100 - 8300 Hz
Equivalent input noise	17 dB SPL	21 dB SPL	17 dB SPL	22 dB SPL
Total harmonic distortion at 500 / 800 / 1600 / 3200 Hz	1 / 1 / 1 / 1 %	1 / 1 / 2 / - %	1 / 2 / 1 / 1 %	2 / 3 / 2 / - %
Tinnitus Function broadband	65 dB SPL	–	70 dB SPL	–
AI-DI	4.0 dB		4.0 dB	
Inductive coil sensitivity				
MASL (1 mA/m) at 1.6 kHz	–	–	–	–
HFA MASL (1 mA/m)	–	–	–	–
HFA SPLITS (left/right)	–	–	–	–
RSETS (left/right)	–	–	–	–
HFA SPLIV	–	–	–	–
Battery				
Battery voltage	1.3 V		1.3 V	
Battery current drain	1.9 mA	1.9 mA	2.1 mA	2.1 mA
Battery runtime (without streaming)	up to 19 h		up to 19 h	
Battery runtime (incl. 2h streaming)	up to 17 h		up to 17 h	
IRIL IEC 60118-13:2016 Ed. 4.0				
700-960 MHz (rating)	user		user	
1400-2000 MHz (rating)	user		user	
2000-2700 MHz (rating)	user		user	
ANSI C63.19-2011				
800-950 MHz (rating)	M4		M4	
1600-2500 MHz (rating)	M4		M4	

Please find additional information to the values on page “Further Information”


M-Core SR · Technical Data

Type	P-Receiver	
	2 ccm coupler	Ear simulator
Output sound pressure level		
OSPL 90 at 1.6 kHz	–	128 dB SPL
OSPL 90 (Peak)	124 dB SPL	134 dB SPL
HFA-OSPL 90	119 dB SPL	–
Gain		
FOG at 1.6 kHz	–	70 dB
FOG (peak)	70 dB	80 dB
HFA-FOG	63 dB	–
Reference test gain	42 dB	53 dB
Frequency, noise and directivity		
Frequency range 80 60 / 40	100 - 7500 Hz 100 - 7500 Hz	100 - 8100 Hz 100 - 8100 Hz
Equivalent input noise	16 dB SPL	20 dB SPL
Total harmonic distortion at 500 / 800 / 1600 / 3200 Hz	1 / 2 / 1 / 1 %	3 / 4 / 2 / - %
Tinnitus Function broadband	75 dB SPL	–
AI-DI	4.0 dB	
Inductive coil sensitivity		
MASL (1 mA/m) at 1.6 kHz	–	–
HFA MASL (1 mA/m)	–	–
HFA SPLITS (left/right)	–	–
RSETS (left/right)	–	–
HFA SPLIV	–	–
Battery		
Battery voltage	1.3 V	
Battery current drain	2.0 mA	1.9 mA
Battery runtime (without streaming)	up to 19 h	
Battery runtime (incl. 2h streaming)	up to 17 h	
IRIL IEC 60118-13:2016 Ed. 4.0		
700-960 MHz (rating)	user	
1400-2000 MHz (rating)	user	
2000-2700 MHz (rating)	user	
ANSI C63.19-2011		
800-950 MHz (rating)	M4	
1600-2500 MHz (rating)	M4	

Please find additional information to the values on page “Further Information”


M-Core SR · Fitting Range

S-Receiver

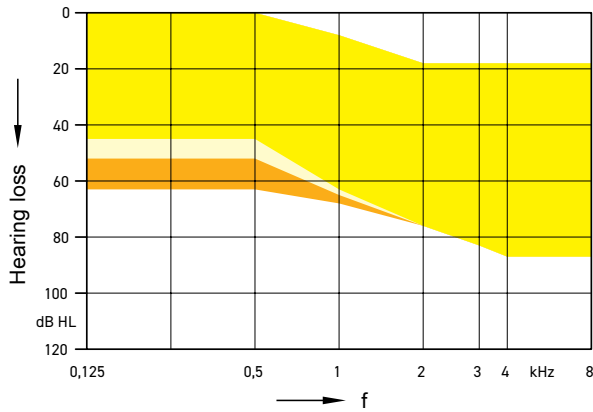


Open Click Domes
 + Closed Click Domes
 + + Click Mold (no vent)

M-Receiver

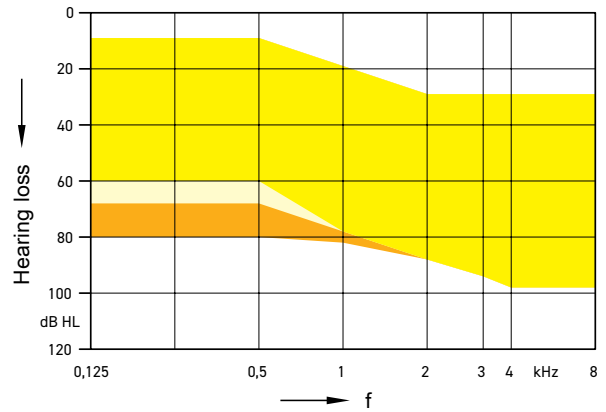

Open Click Domes
 + Closed Click Domes
 + + Click Mold (no vent)


P-Receiver

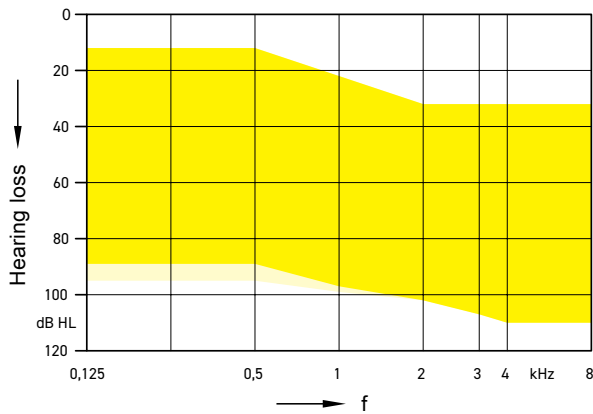

Double Click Domes
 + Click Mold (no vent)


S-Receiver (Closed Click Dome) · Basic Data

2 ccm coupler

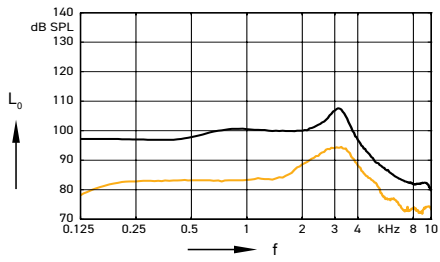


Max. Output sound pressure level ($L_1 = 90$ dB)

Full on gain ($L_1 = 50$ dB)

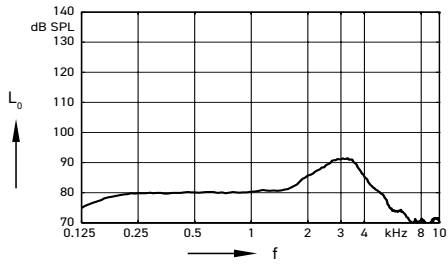


Frequency response ($L_1 = 60$ dB)

Ear simulator

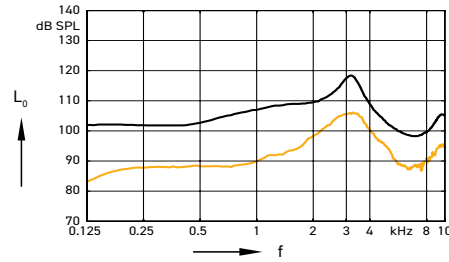

Max. Output sound pressure level ($L_1 = 90$ dB)



Full on gain ($L_1 = 50$ dB)

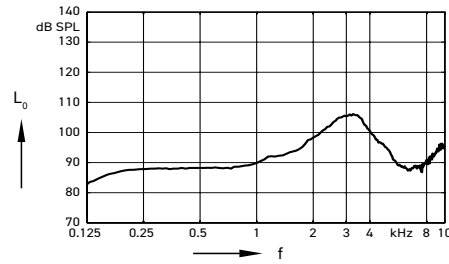



Basic acoustic response ($L_1 = 60$ dB)

M-Receiver (Closed Click Dome) · Basic Data

2 ccm coupler

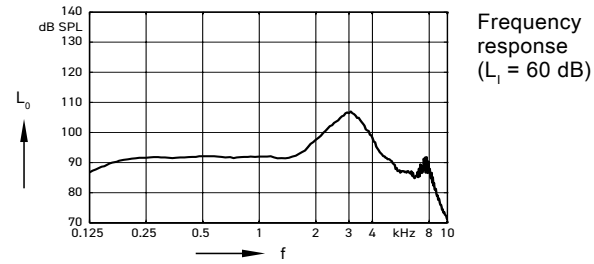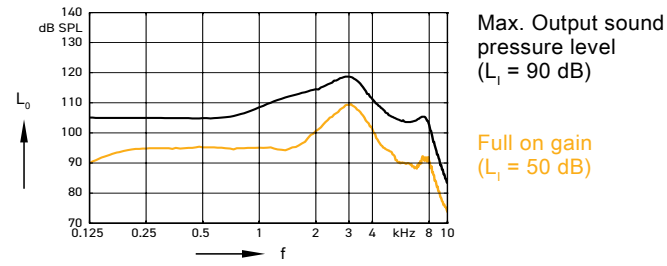


Ear simulator

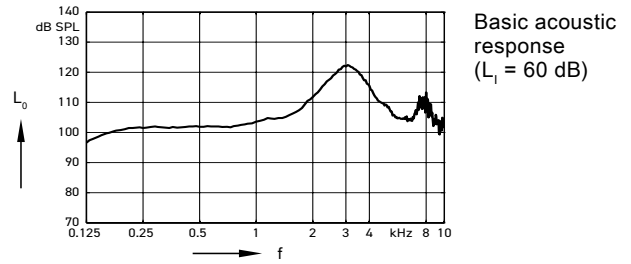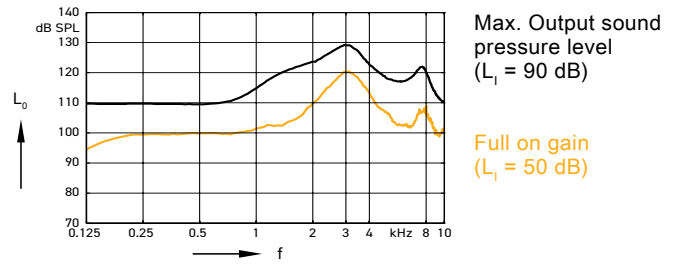


P-Receiver (Closed mold) · Basic Data

2 ccm coupler

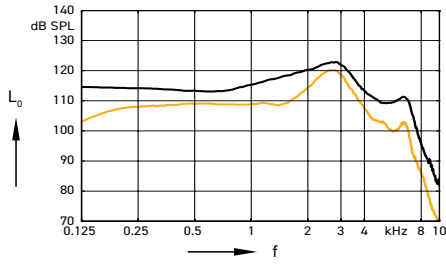


Max. Output sound pressure level ($L_i = 90$ dB)

Full on gain ($L_i = 50$ dB)

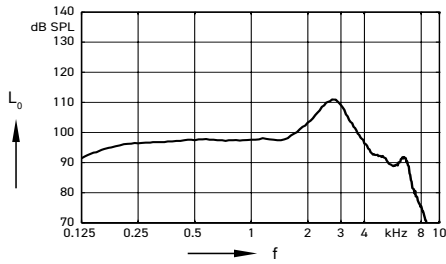


Frequency response ($L_i = 60$ dB)

Ear simulator

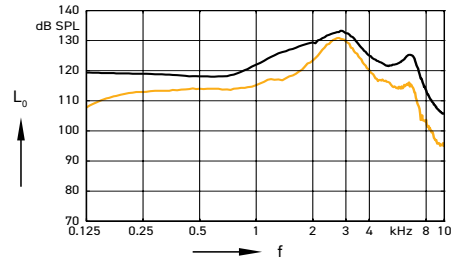

Max. Output sound pressure level ($L_i = 90$ dB)

Full on gain ($L_i = 50$ dB)

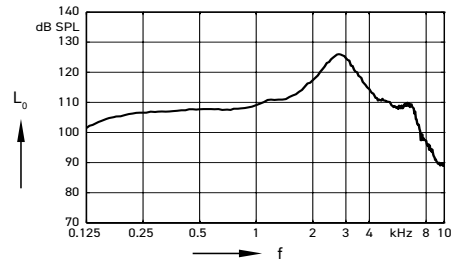

Basic acoustic response ($L_i = 60$ dB)

M-Core SR · Features and Accessories

	80	60	40
Features			
Channels / Controls / Programs	48 / 20 / 6	32 / 16 / 6	24 / 12 / 6
Soundpro	High Res	High Res	High Res
My Voice (own voice processing)	●	●	●
Direct Streaming / Auto Volume	Made for iPhone via TV Transmitter & Smart Mic. / Auto Volume	Made for iPhone via TV Transmitter & Smart Mic. / Auto Volume	Made for iPhone via TV Transmitter & Smart Mic. / Auto Volume
Wireless Sync	●	●	●
Directionality	Automatic Adaptive iOmni Front & Back Left & Right Narrow	Automatic Adaptive iOmni Front & Back	Automatic Adaptive iOmni
Noise Reduction	Noise Management SoundSmoothing Directional	Noise Management SoundSmoothing Directional	Noise Management SoundSmoothing
Wind Noise Reduction	Standard Binaural	Standard Binaural	Standard
Reverb Reducer	●	—	—
Bandwidth: Extension / Compression	●/●	— / ●	— / ●
Music Enhancer (Live / Recorded / Playing)	●	●	—
Tinnitus Function	Sound Therapy Notch Therapy	Sound Therapy Notch Therapy	Sound Therapy Notch Therapy
XPhone	●	●	●
Acclimatization / Data logging	●/●	●/●	●/●
Accessories			
Slim-RIC Travel Charger	Mandatory	Mandatory	Mandatory
Smart Mic	●	●	●
Smart Transmitter 2.4	●	●	●
Smart Key	●	●	●
Rexton App	●	●	●
M-Core CROS 312	—	—	—
M-Core CROS R-Li	—	—	—
M-Core CROS iX-CIC	—	—	—

● available — not available

M-Core SR · Further information

Abbreviations

The following abbreviations are used in this datasheet:

OSPL	Output Sound Pressure Level
HFA	High Frequency Average
FOG	Full-On Gain
MASL	Magneto Acoustical Sensitivity Level
SPLITS	Coupler SPL for an Inductive Telephone Simulator
RSETS	Relative Equivalent Telephone Sensitivity
SPLIV	SPL In a Vertical magnetic field
AI-DI	Articulation Index - Directivity Index
IRIL	Input Related Interference Level
RTF	Reference Test Frequency

Standards

- ▶ All measurements with the 2 ccm coupler were performed according to ANSI S3.22-2014 and IEC 60118-0:2015 if applicable.
- ▶ All measurements with an ear simulator were performed according to IEC 118-0/A1:1994 and to DIN 45605 (frequency range) if applicable.
- ▶ Curves and figures representing FOG are measured with 20 dB reduction and 70 dB SPL input level.
- ▶ HD Bandwidth up to 10 kHz for 80 devices only.
- ▶ Figures representing Equivalent Input Noise incorporate a moderate expansion.
- ▶ Tinnitus noiser measurement conditions: all tinnitus single frequency sliders in max position, master volume slider in default position (0 dB) and local volume control in default position.
- ▶ Inductive coil sensitivity values, inductive response curves and T ratings apply for instruments with telecoil battery door only.
- ▶ The following acoustic connections / ear pieces were used:
 - S-Receiver Unit and M-Receiver Unit: Closed Click Dome
 - P-Receiver Unit: Click Mold
- ▶ The current consumption is measured in reference test setting (RTS) according to the applicable standards. Due to the settling behaviour of hearing instruments supporting RF (radio frequency), the battery current is measured 3 minutes after turning on (note: no pairing).
- ▶ The battery runtime is based on first fit settings using 60% of the fitting range and an ISTS (International Speech Test Signal) input signal at 65 dB SPL (note: pairing established). The actual battery runtime is determined by battery quality, hearing loss, sound environment, usage and activated feature set. Regarding RF usage (Bluetooth streaming) two different conditions are considered.

Special note for instruments with built-in lithium-ion rechargeable battery

- ▶ The runtime of all lithium-ion rechargeable batteries reduces over time. The estimates are based on fresh lithium-ion rechargeable battery capacity. Under normal operating conditions, the battery will retain up to 80% of its initial capacity after 2 years of use. Please note that battery performance will vary depending on individual usage patterns and environmental conditions.

Made for

 iPhone | iPad | iPod

“Made for iPod”, “Made for iPhone”, and “Made for iPad” mean that an electronic accessory has been designed to connect specifically to iPod, iPhone, or iPad, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPod, iPhone, or iPad may affect wireless performance.

The information in this document contains general descriptions of the technical options available, which do not always have to be present in individual cases and are subject to change without prior notice. The required features should therefore be specified in each individual case at the time of conclusion of the respective contract.

WARNING


Choking hazard posed by small parts.

- ▶ This instrument is not intended for the fitting of infants, children under 3 years or persons of mental incapacity.

WARNING

Instrument has an output sound pressure level of 132 dB SPL or more. Risk of impairing the residual hearing of the user.

- ▶ Take special care when fitting this instrument.

 Legal Manufacturer
Sivantos GmbH
Henri-Dunant-Strasse 100
91058 Erlangen
Germany

Subject to change without
prior notice

Order No. 04231-99T2-7600
© 07.2020, Sivantos GmbH
All rights reserved