





S Receiver 2 cm³ coupler data

ANSI / ASA S3.22-2014
IEC 60118-0 : 2015

Output sound pressure level

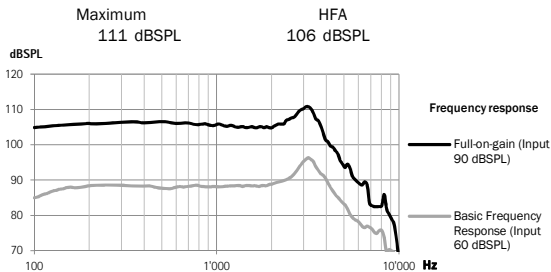


Acoustic gain

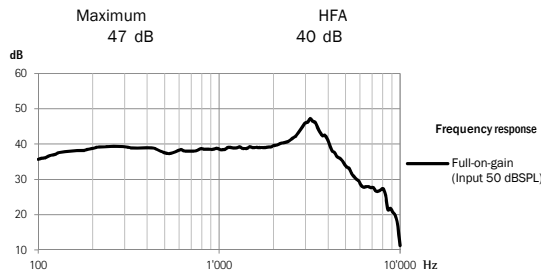

| | | | | |
|------------------------------|--------------------|--------|---------|---------|
| Frequency range | <100 Hz - >8000 Hz | | | |
| Total harmonic distortion | 500 Hz | 800 Hz | 1600 Hz | 3200 Hz |
| | 1.5% | 2.0% | 2.0% | 1.0% |
| Expected operating time* | 18 h | | | |
| Equivalent input noise level | 19 dB SPL | | | |


Induction coil sensitivity

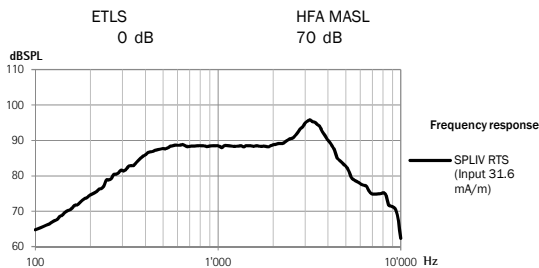


M Receiver 2 cm³ coupler data

ANSI / ASA S3.22-2014
IEC 60118-0 : 2015

Output sound pressure level

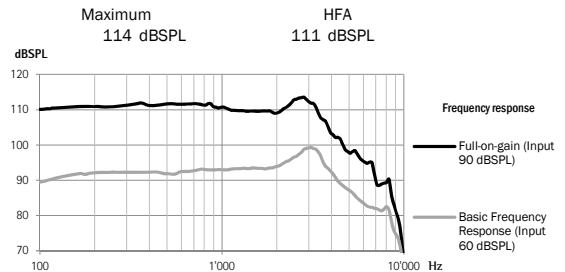


Acoustic gain

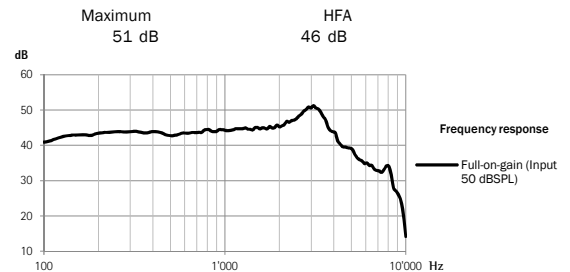

| | | | | |
|------------------------------|--------------------|--------|---------|---------|
| Frequency range | <100 Hz - >8000 Hz | | | |
| Total harmonic distortion | 500 Hz | 800 Hz | 1600 Hz | 3200 Hz |
| | 1.5% | 2.0% | 2.0% | 1.0% |
| Expected operating time* | 18 h | | | |
| Equivalent input noise level | 19 dB SPL | | | |

Induction coil sensitivity

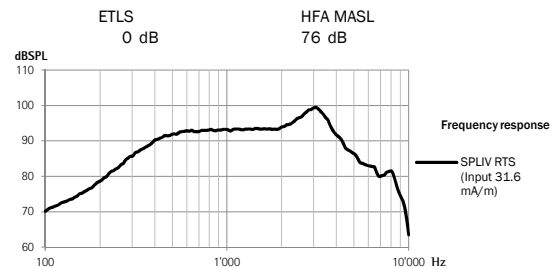

General test information

- Specific measurement settings are used. RTS adjustment with volume control
- The device is operating in linear mode
- Low-level expansion is active
- All data obtained are measured with Phonak Target measurement settings

Warnings


- ⚠ This hearing instrument has an output sound pressure level that can exceed 132 dB SPL. Special care should be taken when fitting this instrument as there is a risk of impairing the residual hearing of the user.
- ⚠ Changes or modifications to the hearing aid that are not explicitly approved by the manufacturer are not permitted. Such changes may damage the ear or the hearing aid.

* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.


P Receiver 2 cm³ coupler data

ANSI / ASA S3.22-2014
IEC 60118-0 : 2015


Output sound pressure level

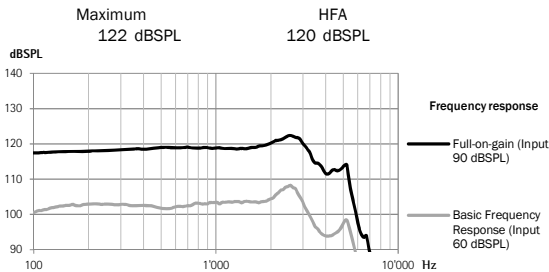

Acoustic gain

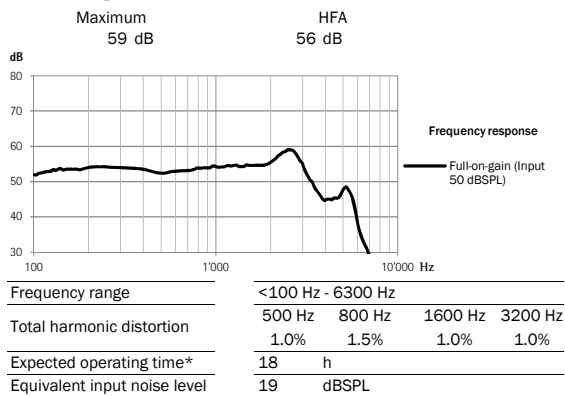

Induction coil sensitivity

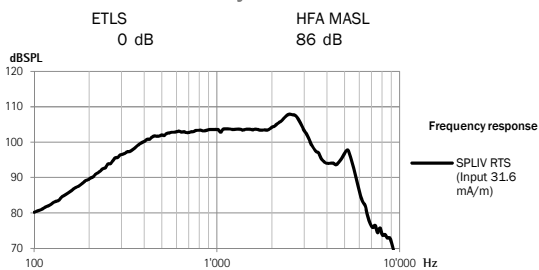


* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.


UP Receiver 2 cm³ coupler data

ANSI / ASA S3.22-2014
IEC 60118-0 : 2015

Output sound pressure level

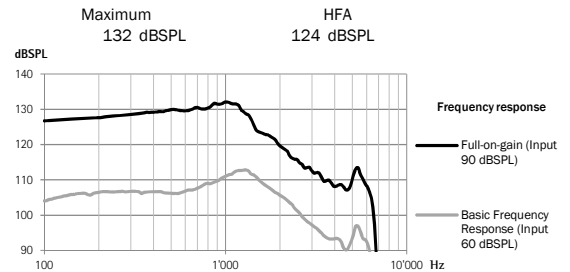

Acoustic gain

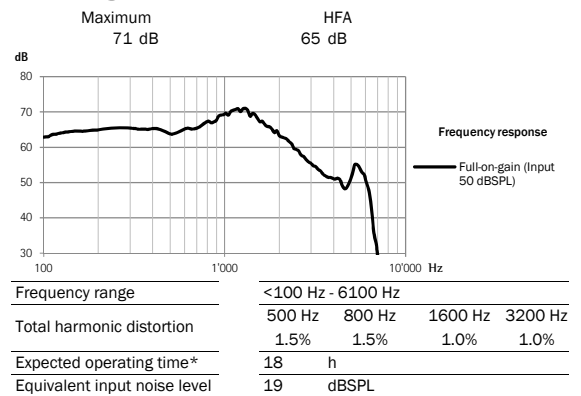

Induction coil sensitivity

